


# Chapter 11: Mass-Storage Systems

---



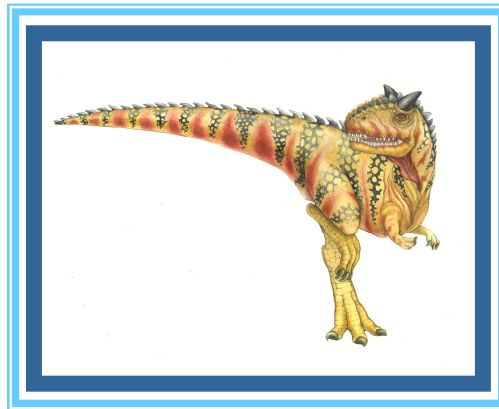

# Chapter 10: Mass-Storage Systems

---

- Overview of Mass Storage Structure
- Disk Structure
- Disk Scheduling
- RAID Structure





# Objectives


---

- To describe the physical structure of secondary storage devices and its effects on the uses of the devices
- To explain the performance characteristics of mass-storage devices
- To evaluate disk scheduling algorithms
- To discuss operating-system services provided for mass storage, including RAID





# Moving-head Disk Mechanism

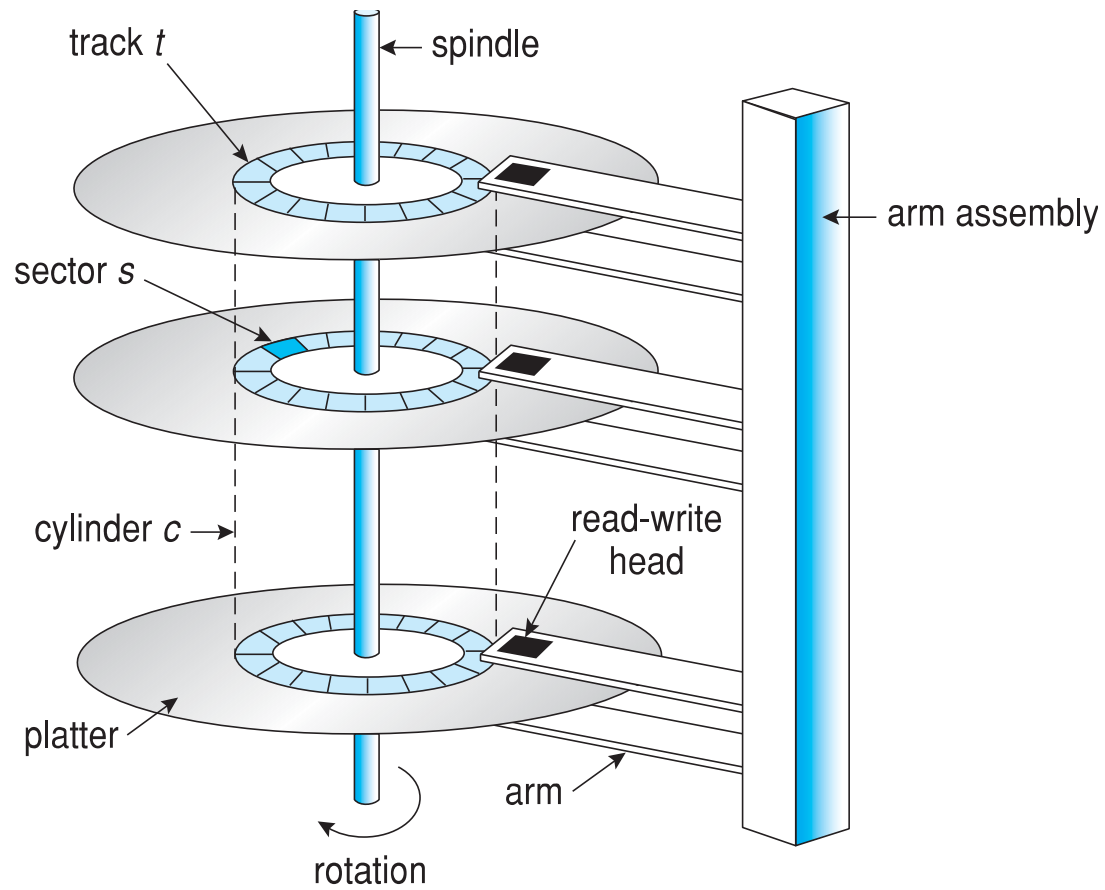



# Overview of Mass Storage Structure

- **Magnetic disks** provide bulk of secondary storage of modern computers
  - Drives rotate at 60 to 250 times per second
  - **Transfer rate** is rate at which data flow between drive and computer
  - **Positioning time** (**random-access time**) is time to move disk arm to desired cylinder (**seek time**) and time for desired sector to rotate under the disk head (**rotational latency**)
  - **Head crash** results from disk head making contact with the disk surface -- That's bad
- Disks can be removable
- Drive attached to computer via **I/O bus**
  - Busses vary, including **EIDE, ATA, SATA, USB, Fibre Channel, SCSI, SAS, Firewire**
  - **Host controller** in computer uses bus to talk to **disk controller** built into drive or storage array





# Hard Disks

- Platters range from .85” to 14” (historically)
  - Commonly 3.5”, 2.5”, and 1.8”
- Range from 30GB to 3TB per drive
- Performance
  - Transfer Rate – theoretical – 6 Gb/sec
  - Effective Transfer Rate – real – 1Gb/sec
  - Seek time from 3ms to 12ms – 9ms common for desktop drives
  - Average seek time measured or calculated based on 1/3 of tracks
  - Latency based on spindle speed
    - ▶  $1 / (\text{RPM} / 60) = 60 / \text{RPM}$
  - Average latency =  $\frac{1}{2}$  latency

Spindle [rpm]	Average latency [ms]
4200	7.14
5400	5.56
7200	4.17
10000	3
15000	2

(From Wikipedia)





# Hard Disk Performance

- **Access Latency = Average access time** = average seek time + average latency
  - For fastest disk  $3\text{ms} + 2\text{ms} = 5\text{ms}$
  - For slow disk  $9\text{ms} + 5.56\text{ms} = 14.56\text{ms}$
- Average I/O time = average access time + (amount to transfer / transfer rate) + controller overhead
- For example to transfer a 4KB block on a 7200 RPM disk with a 5ms average seek time, 1Gb/sec transfer rate with a .1ms controller overhead =
  - $5\text{ms} + 4.17\text{ms} + 0.1\text{ms} + \text{transfer time} =$
  - Transfer time =  $4\text{KB} / 1\text{Gb/s} * 8\text{Gb} / \text{GB} * 1\text{GB} / 1024^2\text{KB} = 32 / (1024^2) = 0.031 \text{ ms}$
  - Average I/O time for 4KB block =  $9.27\text{ms} + .031\text{ms} = 9.301\text{ms}$





# The First Commercial Disk Drive



1956

IBM RAMDAC computer  
included the IBM Model  
350 disk storage system

5M (7 bit) characters

50 x 24" platters

Access time = < 1 second







# Disk Scheduling

---

- The operating system is responsible for using hardware efficiently — for the disk drives, this means having a fast access time and disk bandwidth
- Minimize seek time
- Seek time  $\approx$  seek distance
- Disk **bandwidth** is the total number of bytes transferred, divided by the total time between the first request for service and the completion of the last transfer





# Disk Scheduling (Cont.)

---

- There are many sources of disk I/O request
  - OS
  - System processes
  - Users processes
- I/O request includes input or output mode, disk address, memory address, number of sectors to transfer
- OS maintains queue of requests, per disk or device
- Idle disk can immediately work on I/O request, busy disk means work must queue
  - Optimization algorithms only make sense when a queue exists





# Disk Scheduling (Cont.)

---

- Note that drive controllers have small buffers and can manage a queue of I/O requests (of varying “depth”)
- Several algorithms exist to schedule the servicing of disk I/O requests
- The analysis is true for one or many platters
- We illustrate scheduling algorithms with a request queue (0-199)

98, 183, 37, 122, 14, 124, 65, 67

Head pointer 53






# FCFS

Illustration shows total head movement of 640 cylinders


queue = 98, 183, 37, 122, 14, 124, 65, 67  
head starts at 53

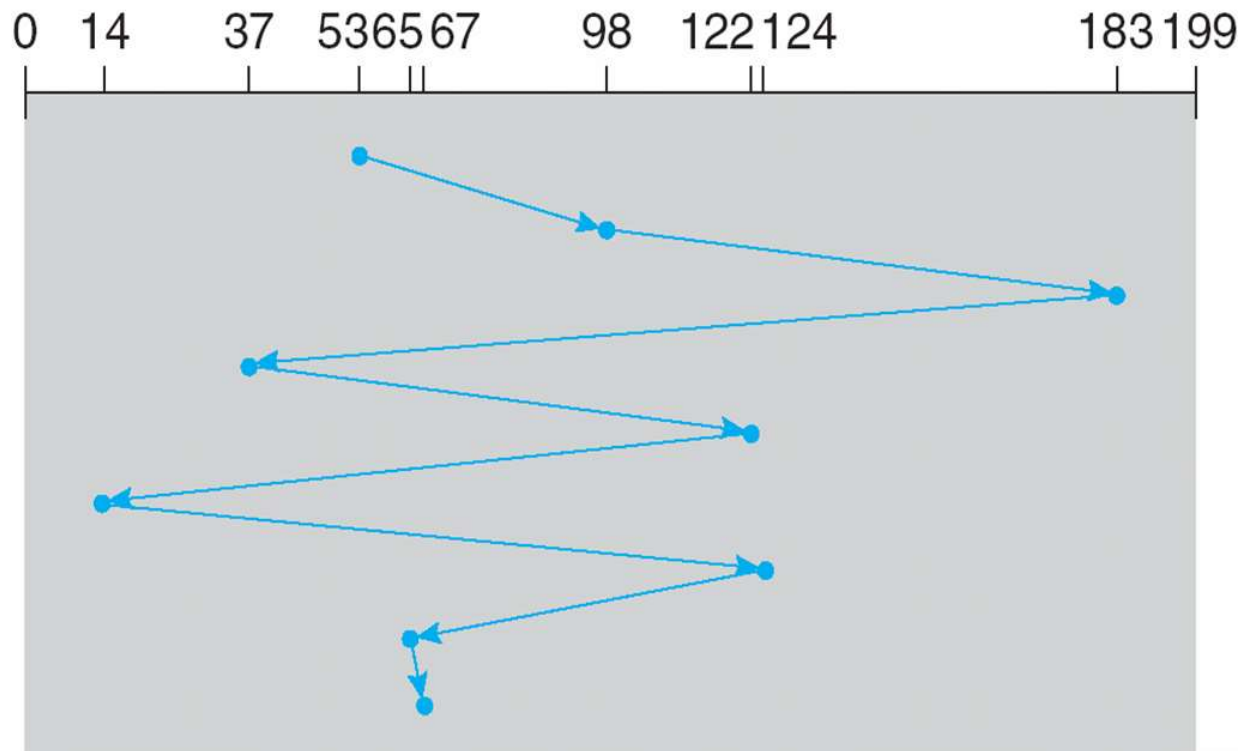



# Shortest Seek Time First (SSTF)

- Shortest Seek Time First selects the request with the minimum seek time from the current head position
- SSTF scheduling is a form of SJF scheduling; may cause starvation of some requests
- Illustration shows total head movement of 236 cylinders

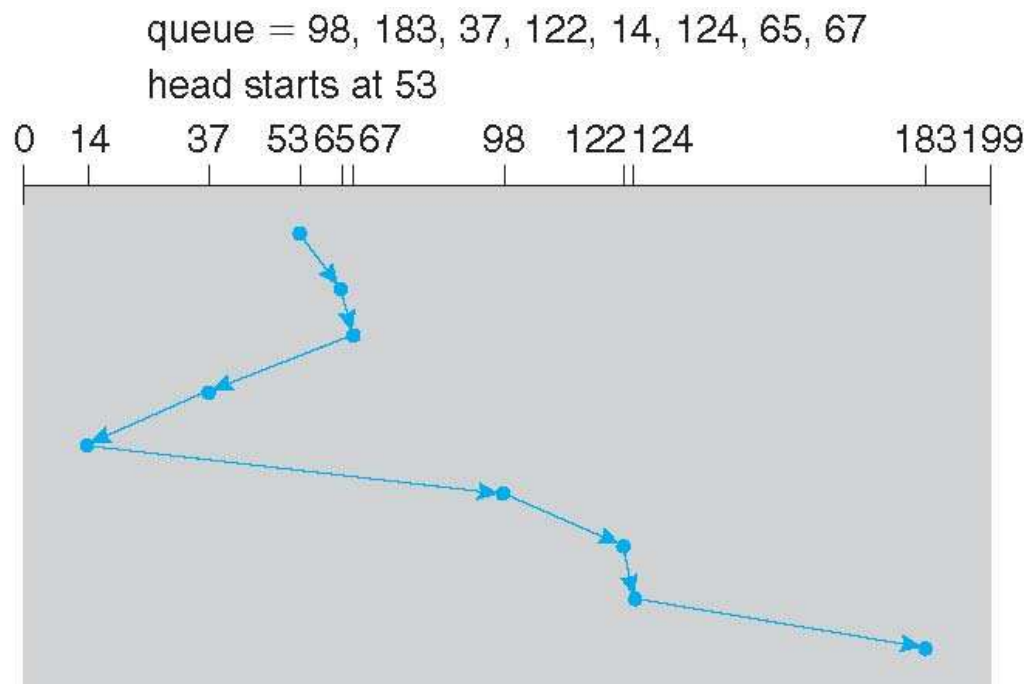



# SCAN

---


- The disk arm starts at one end of the disk, and moves toward the other end, servicing requests until it gets to the other end of the disk, where the head movement is reversed and servicing continues.
- **SCAN algorithm** Sometimes called the **elevator algorithm**
- Illustration shows total head movement of 236 cylinders
- But note that if requests are uniformly dense, largest density at other end of disk and those wait the longest





# SCAN (Cont.)

queue = 98, 183, 37, 122, 14, 124, 65, 67  
head starts at 53

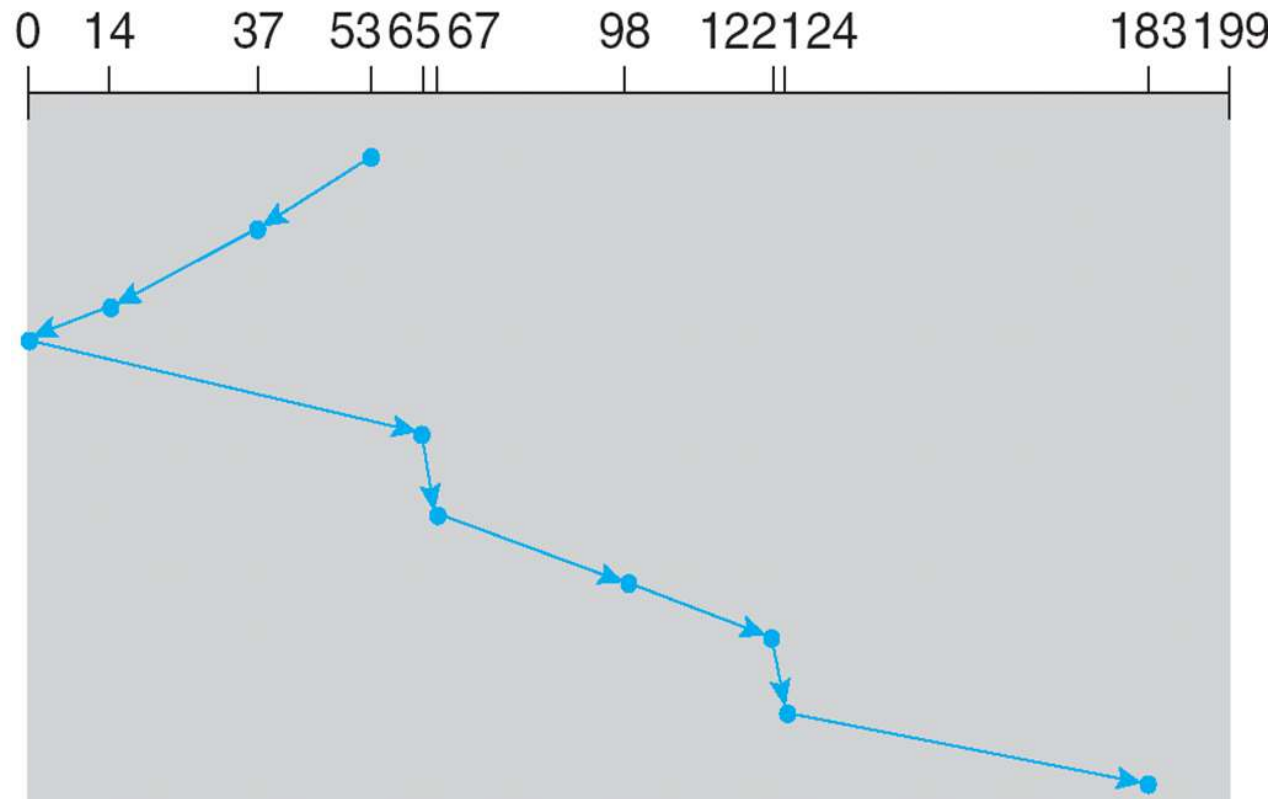



# C-SCAN

---

- Provides a more uniform wait time than SCAN
- The head moves from one end of the disk to the other, servicing requests as it goes
  - When it reaches the other end, however, it immediately returns to the beginning of the disk, without servicing any requests on the return trip
- Treats the cylinders as a circular list that wraps around from the last cylinder to the first one
- Total number of cylinders?








# C-SCAN (Cont.)

queue = 98, 183, 37, 122, 14, 124, 65, 67  
head starts at 53

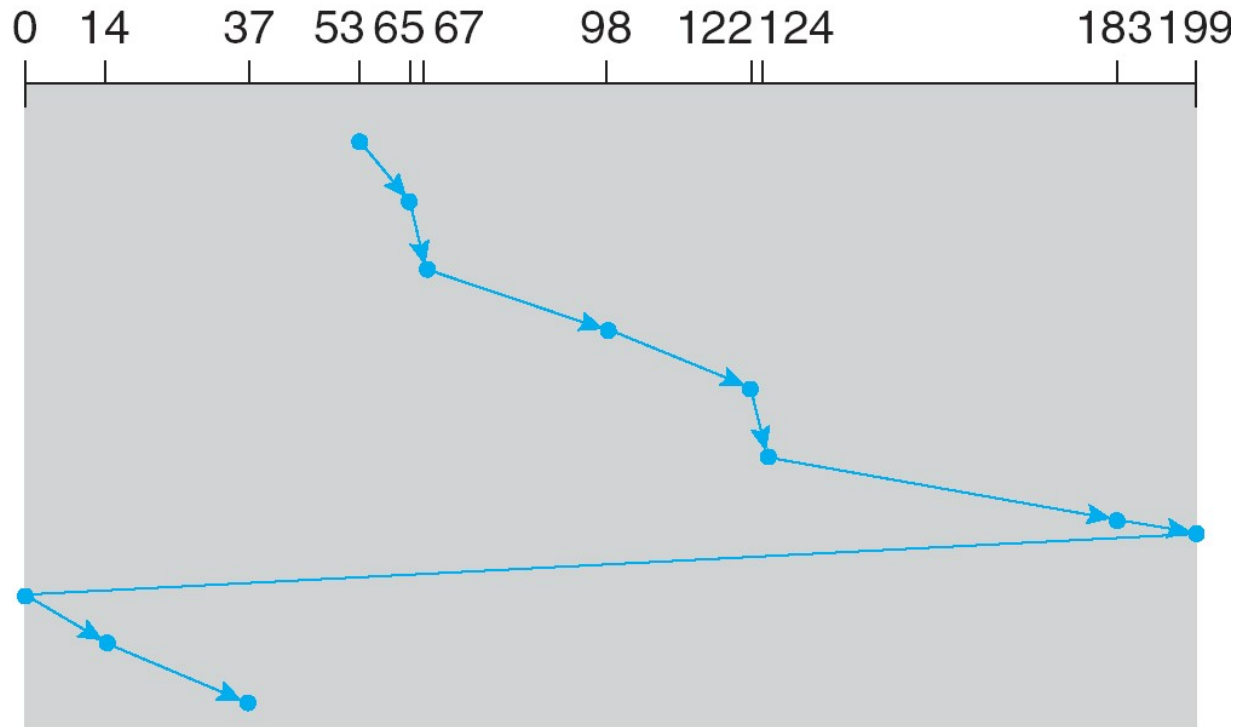



# C-LOOK

---


- LOOK a version of SCAN, C-LOOK a version of C-SCAN
- Arm only goes as far as the last request in each direction, then reverses direction immediately, without first going all the way to the end of the disk
- Total number of cylinders?





# C-LOOK (Cont.)

queue = 98, 183, 37, 122, 14, 124, 65, 67  
head starts at 53

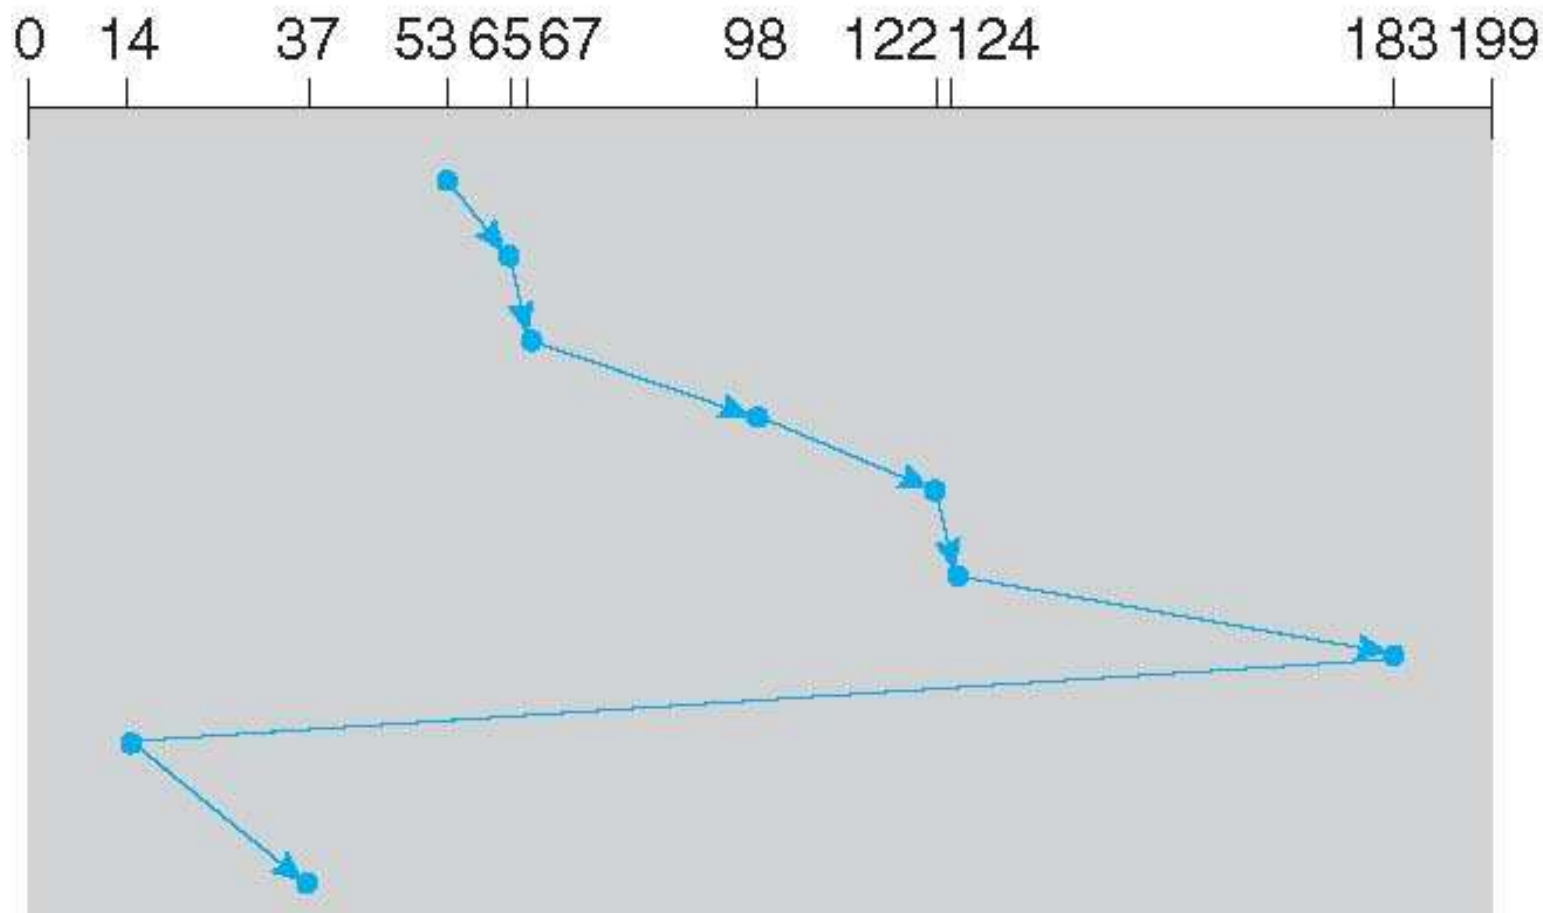



# Selecting a Disk-Scheduling Algorithm

- SSTF is common and has a natural appeal
- SCAN and C-SCAN perform better for systems that place a heavy load on the disk
  - Less starvation
- Performance depends on the number and types of requests
- Requests for disk service can be influenced by the file-allocation method
  - And metadata layout
- The disk-scheduling algorithm should be written as a separate module of the operating system, allowing it to be replaced with a different algorithm if necessary
- Either SSTF or LOOK is a reasonable choice for the default algorithm
- What about rotational latency?
  - Difficult for OS to calculate
- How does disk-based queueing effect OS queue ordering efforts?





# RAID Structure

---

- RAID – redundant array of inexpensive disks
  - multiple disk drives provides reliability via **redundancy**
- Increases the **mean time to failure**
- **Mean time to repair** – exposure time when another failure could cause data loss
- **Mean time to data loss** based on above factors
- If mirrored disks fail independently, consider disk with 1300,000 mean time to failure and 10 hour mean time to repair
  - Mean time to data loss is  $100,000^2 / (2 * 10) = 500 * 10^6$  hours, or 57,000 years!
- Frequently combined with **NVRAM** to improve write performance
- Several improvements in disk-use techniques involve the use of multiple disks working cooperatively





# RAID (Cont.)


---

- Disk **striping** uses a group of disks as one storage unit
- RAID is arranged into six different levels
- RAID schemes improve performance and improve the reliability of the storage system by storing redundant data
  - **Mirroring** or **shadowing (RAID 1)** keeps duplicate of each disk
  - Striped mirrors (**RAID 1+0**) or mirrored stripes (**RAID 0+1**) provides high performance and high reliability
  - **Block interleaved parity (RAID 4, 5, 6)** uses much less redundancy
- RAID within a storage array can still fail if the array fails, so automatic **replication** of the data between arrays is common
- Frequently, a small number of **hot-spare** disks are left unallocated, automatically replacing a failed disk and having data rebuilt onto them






# RAID Levels



(a) RAID 0: non-redundant striping.




(b) RAID 1: mirrored disks.



(c) RAID 2: memory-style error-correcting codes.



(d) RAID 3: bit-interleaved parity.



(e) RAID 4: block-interleaved parity.



(f) RAID 5: block-interleaved distributed parity.




(g) RAID 6: P + Q redundancy.






# RAID (0 + 1) and (1 + 0)

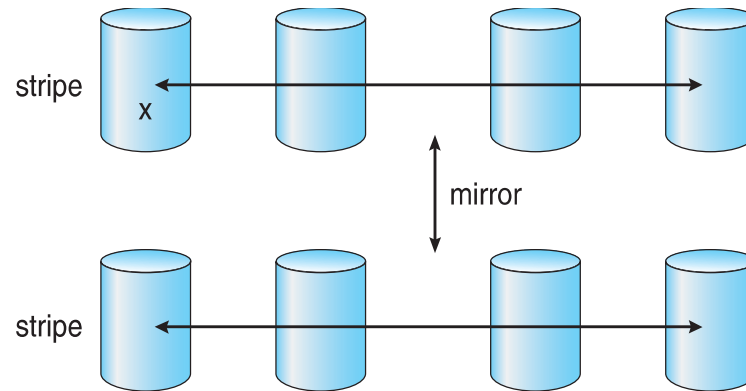

a) RAID 0 + 1 with a single disk failure.

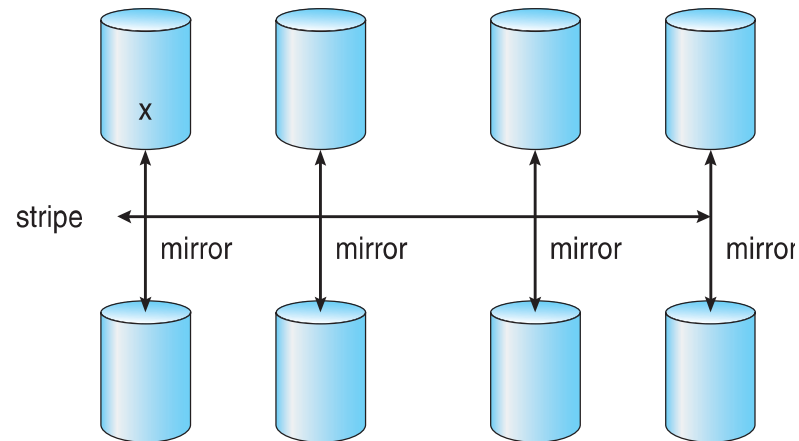

b) RAID 1 + 0 with a single disk failure.







# Other Features

---

- Regardless of where RAID implemented, other useful features can be added
- **Snapshot** is a view of file system before a set of changes take place (i.e. at a point in time)
  - More in Ch 12
- Replication is automatic duplication of writes between separate sites
  - For redundancy and disaster recovery
  - Can be synchronous or asynchronous
- Hot spare disk is unused, automatically used by RAID production if a disk fails to replace the failed disk and rebuild the RAID set if possible
  - Decreases mean time to repair



# End of Chapter 10

---

